


- Multidirectional anti-vibration/shock mounts.
- Displacement under shock up to 30mm.
- Transmissibility : $Q < 6$.
- Maximum static loading 3g.
- Resonant frequency between 8 and 14Hz (*).
- Max peak output at resonance up to 1,25mm.
- Temperature range : -30°C +100°C.
- Great adaptability / versatility.

Specials on request (materials, size and interfaces, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes
BFB
Elastomer: polychloroprene Top and bottom interfaces: corrosion protected steel
Other materials on request

Load capability	static load (daN)		axial stiffness (N.mm ⁻¹)	mass (kg)
	mini	maxi		
1	15	45	85	0,60
2	30	70	145	
3	50	120	250	

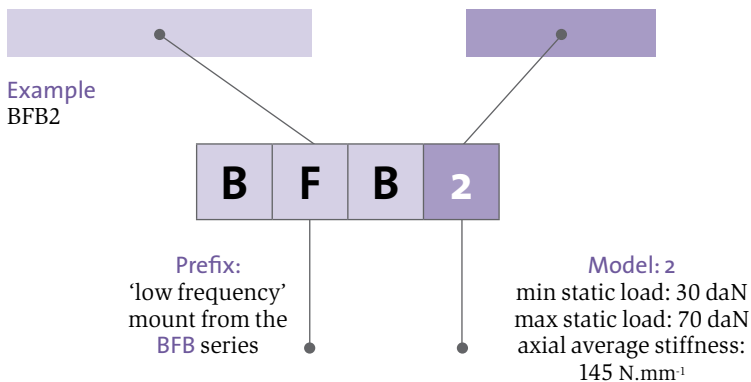

(*)Note : Resonant frequency between 6 and 12Hz along radial direction.