

- All metal multidirectional anti-vibration/shock mounts.
 - Exceptional reliability and long life.
 - High damping.
 - No ageing.
 - Corrosion resistant.
 - Unequalled temperature range : -180°C +300°C.
 - Great adaptability/versatility.
- Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
HH15
Cable: stainless steel (galvanised HHG15)
Retainer bars: aluminium alloy/SurTec
Screws alloy steel/zinc plate
Inserts: stainless steel. All stainless steel version HHSS15
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-12	87	102	1,50
-15	94	112	1,60
-17	98	120	1,70
-20	107	135	1,85
-30	117	152	2,00
-40	125	165	2,15
-50	135	178	2,30
-60	146	185	2,40




Interfaces	Bar 1		
	fixtures holes D	2 through holes ø 10,8mm	2 through holes ø 10,8mm countersunk 90°
Bar 2			
2 through holes ø 10,8mm	TM2	not standard	not standard
2 through holes ø 10,8mm countersunk 90°	TCM	CM2	not standard
2 inserts M10	TIM	CIM	IM2

Example HH15-30CIM

H	H	1	5	-	3	0	C	I	M
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

- Prefix:** 'half helical' mount from the **HH15** series
- Model: -30**
height: 117mm
width: 152mm
mass: 2,0kg
4 loops
- Model: -30-02**
=
=
=
2 loops
- Suffix: CIM**
2 through holes ø 10,8mm countersunk 90° in bar 1,
2 inserts M10 in bar 2

Note: Standard models in this series have 4 loops

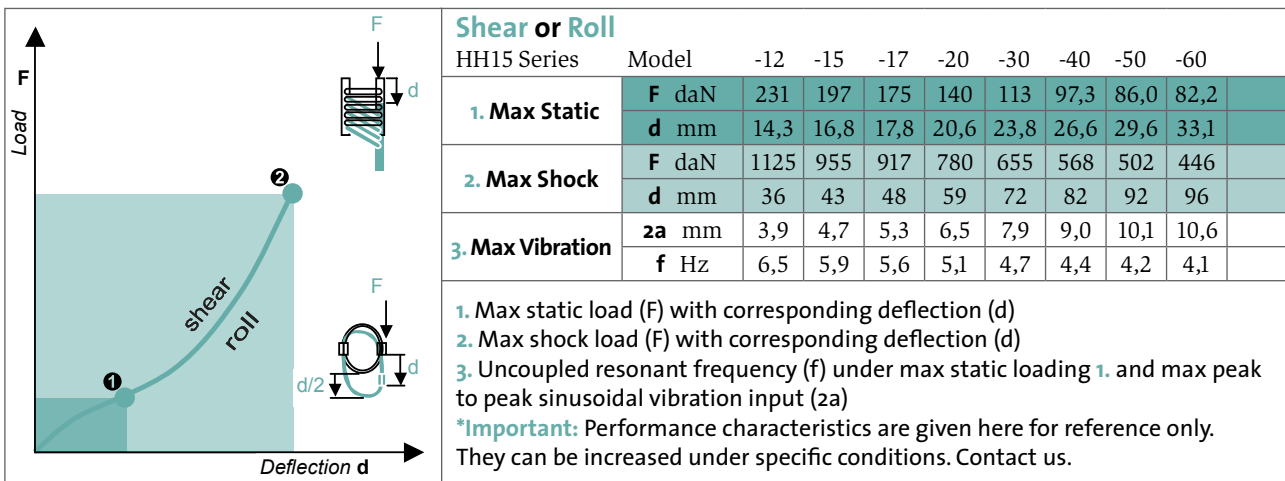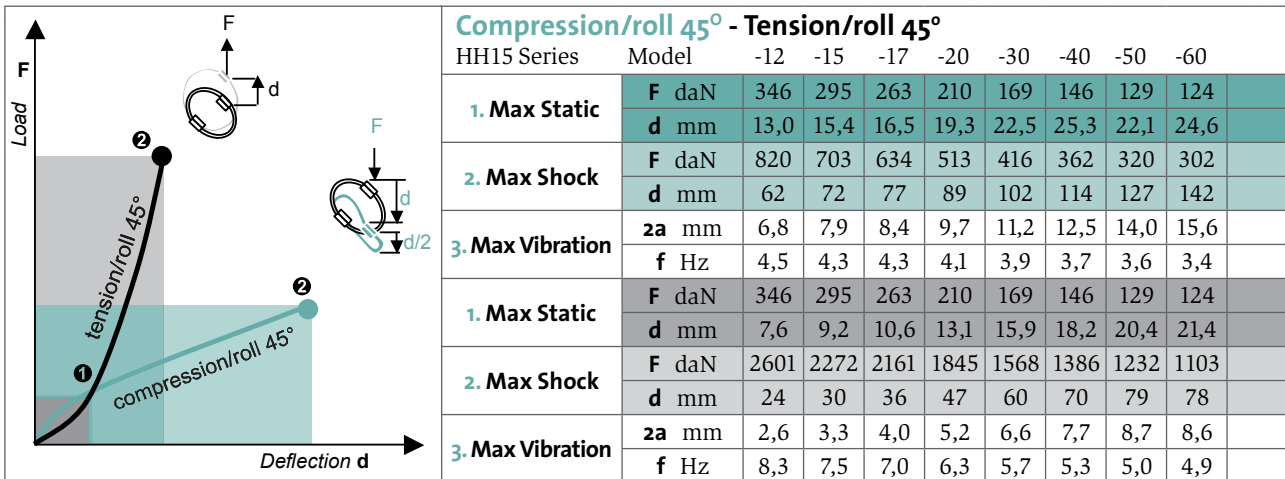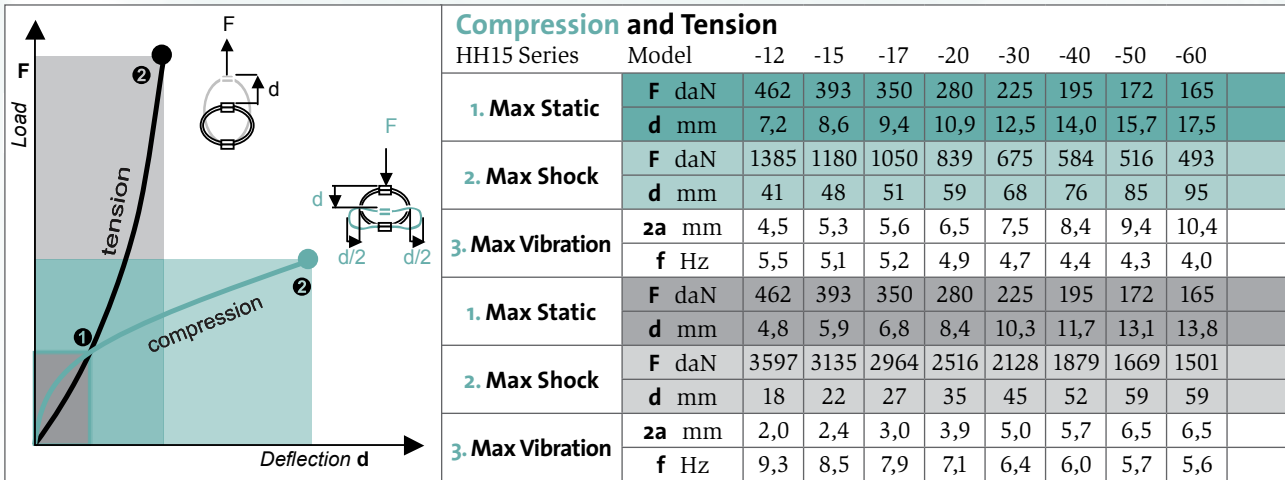

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.