

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.


<b>Series</b>
Materials and finishes (meets RoHS requirements)
<b>CB1270</b>
<b>Cable:</b> stainless steel (galvanised CBG1270)
<b>Retainer bars:</b> aluminium alloy/ SurTec
<b>Screws:</b> alloy steel/ zinc plate
<b>Inserts:</b> stainless steel
Other materials on request

<b>Model</b>	height h (mm)	width w (mm)	mass (kg)
-10	48	55	0,34
-20	54	62	0,37
-25	59	70	0,39
-30	63	79	0,41
-35	63	88	0,43
-38	67	94	0,45
-40	67	99	0,46
-50	82	107	0,50

<b>Interfaces</b>	<b>Bar 1</b>		
fixtures holes D	2 through holes ø 6,4mm	2 through holes ø 6,4mm countersunk 90°	2 inserts M6
<b>Bar 2</b>			
2 through holes ø 6,4mm	no suffix	not standard	not standard
2 through holes ø 6,4mm countersunk 90°	CM	CM2	not standard
2 inserts M6	IM	CIM	IM2



Example  
CB1270-25CM



**Prefix:**  
'helical' mount from the CB1270 series




**Model: -25**  
height: 59mm  
width: 70mm  
mass: 0,39kg  
8 loops

**Model: -25-06**  
=  
=  
=  
6 loops

**Suffix: CM**  
2 through holes ø 6,4mm countersunk 90° in the bars 1 and 2



Note: Standard models in this series have 8 loops

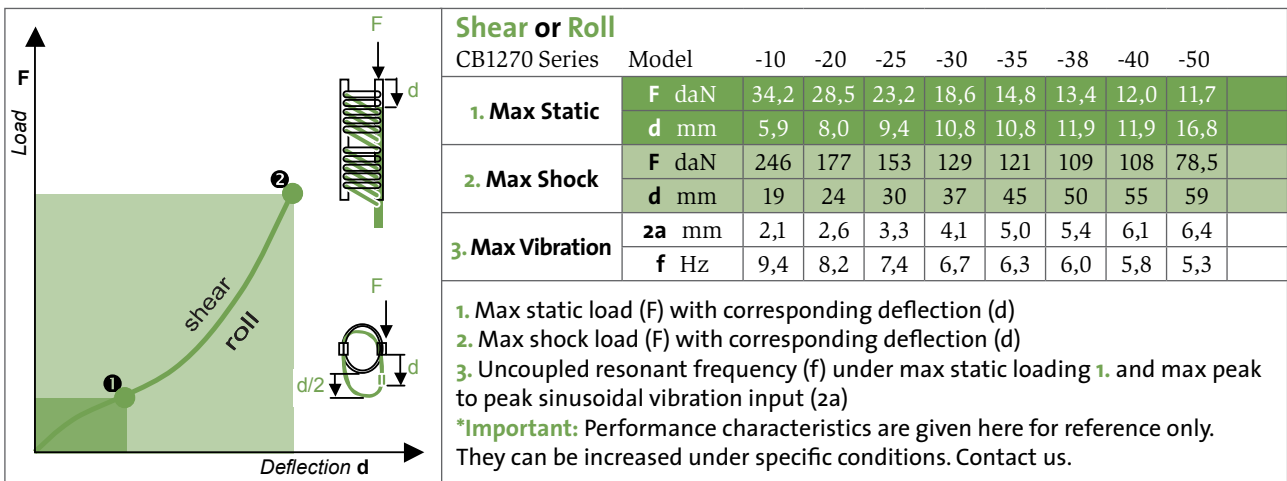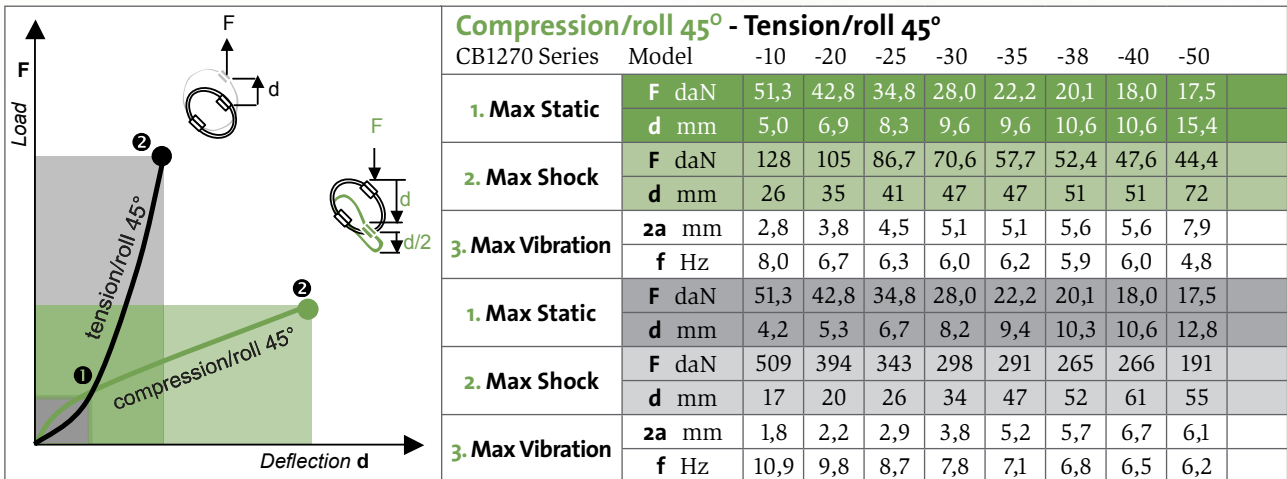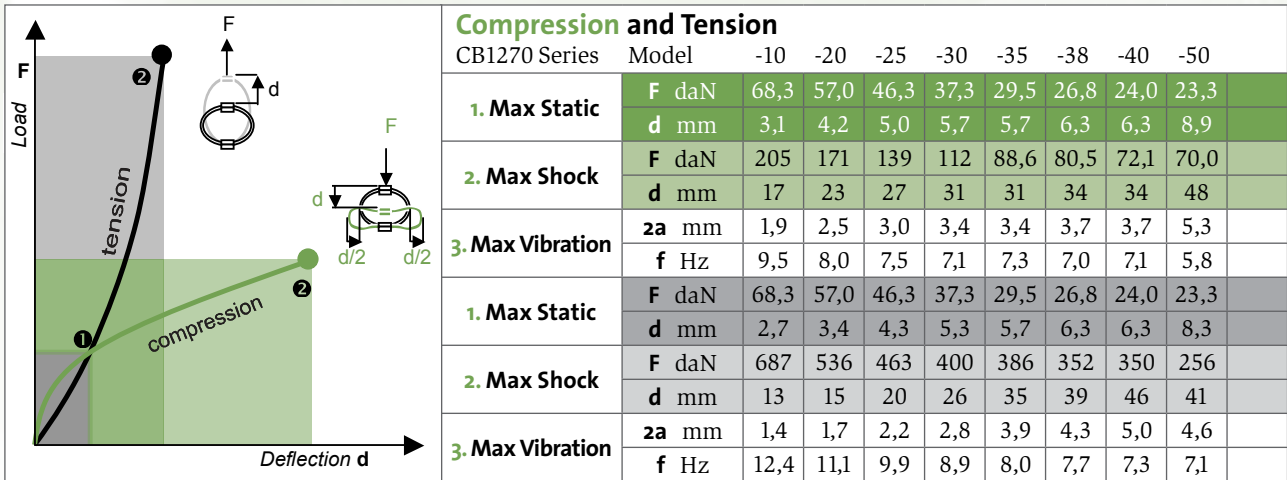

**Typical shock/vibration specifications:**

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.