

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range : -180°C +300°C.
- Great adaptability/versatility.

Specials on request (material size and number of loops, etc.).

Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
<b>CB1900</b>
<b>Cable:</b> stainless steel (galvanised CBG1900)
<b>Retainer bars:</b> aluminium alloy/ SurTec
<b>Screws:</b> alloy steel/ zinc plate
<b>Inserts:</b> stainless steel
Other materials on request

Model	height h (mm)	width w (mm)	mass (kg)
-10	178	216	21
-12	216	241	24
-15	235	260	25

Interfaces	Bar 1		
	fixtures holes D	4 through holes ø 19mm	4 through holes ø 19mm countersunk 90°
<b>Bar 2</b>			
4 through holes ø 19mm	no suffix	not standard	not standard
4 through holes ø 19mm countersunk 90°	CM	CM2	not standard
4 inserts M18	IM	CIM	IM2

Example CB1900-12IM2

C	B	1	9	0	0	-	1	2	I	M	2
---	---	---	---	---	---	---	---	---	---	---	---




Prefix: 'helical' mount from the CB1900 series

Model: -12 height: 216mm width: 241mm mass: 24kg 8 loops

Model: -12-06 = = = 6 loops

Suffix: IM2 4 inserts M18 in bars 1 and 2

Note: Standard models in this series have 8 loops

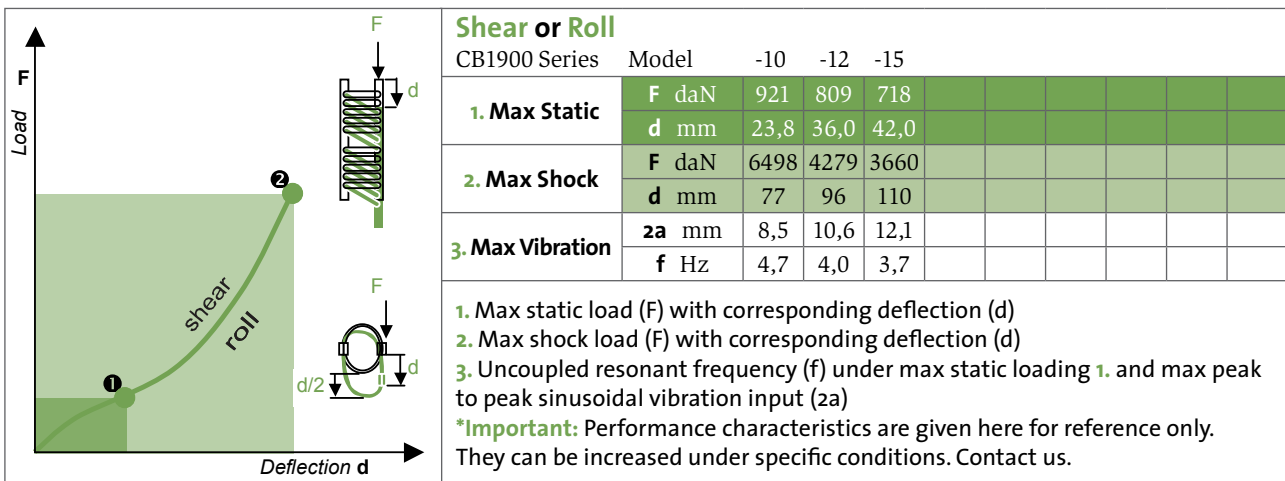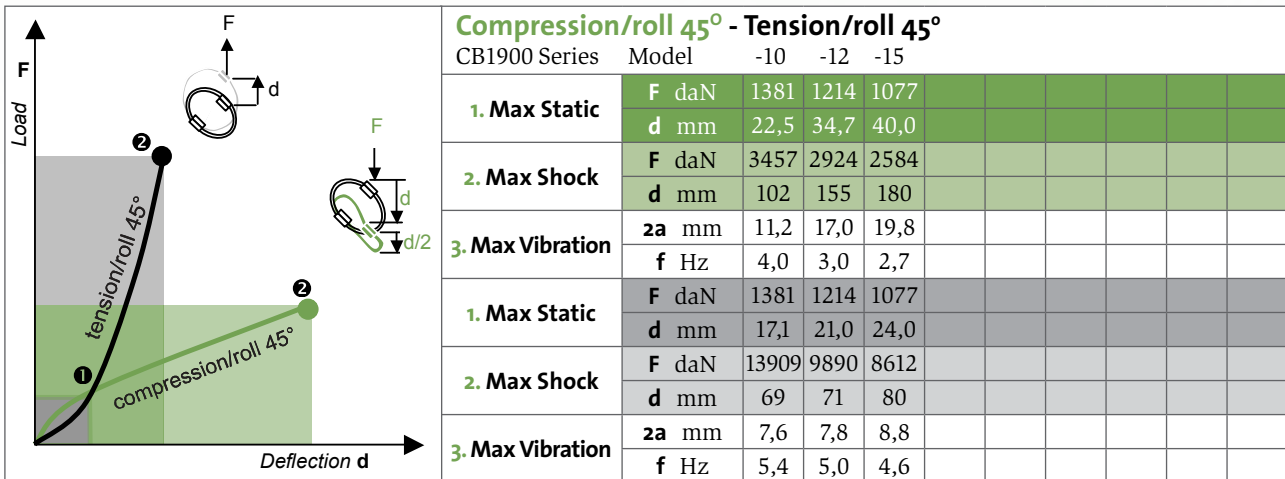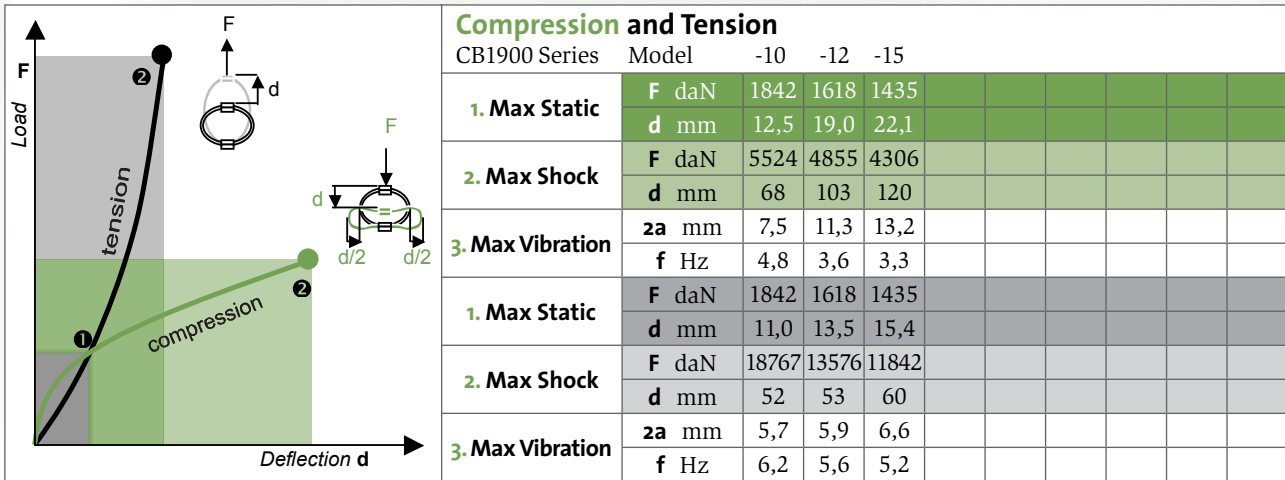

**Typical shock/vibration specifications:**

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.