

- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range  $-180^{\circ}\text{C} +300^{\circ}\text{C}$ .
- Cheap and quick prototypes from stock.

Dimensions are in mm. For reference only.

<b>Series</b>
Materials and finishes (meets RoHS requirements)
<b>MP15</b>
<b>Cable:</b> stainless steel
<b>Interfaces:</b> aluminium alloy
<b>Insert:</b> stainless steel.
Other materials on request

<b>Model</b>	height h (mm)	width u (mm)	width v (mm)	mass (kg)
<b>-315</b>	131	113	175	1,83
<b>-375</b>	151	151	188	1,93
<b>-415</b>	165	154	190	2,03
<b>-515</b>	192	179	212	2,21
<b>-615</b>	223	200	236	2,41

<b>Interfaces</b>	fixtures holes D
<b>Top 1</b>	1 through hole $\varnothing 13,5$ mm (option: Insert M16)
<b>Bottom 2</b>	2 through holes $\varnothing 13,5$ mm






Example MP15-515



Prefix: 'polycal' mount from the MP15 series

Model: -515  
height: 192mm  
width u: 179mm  
width v: 212mm  
mass: 2,21kg



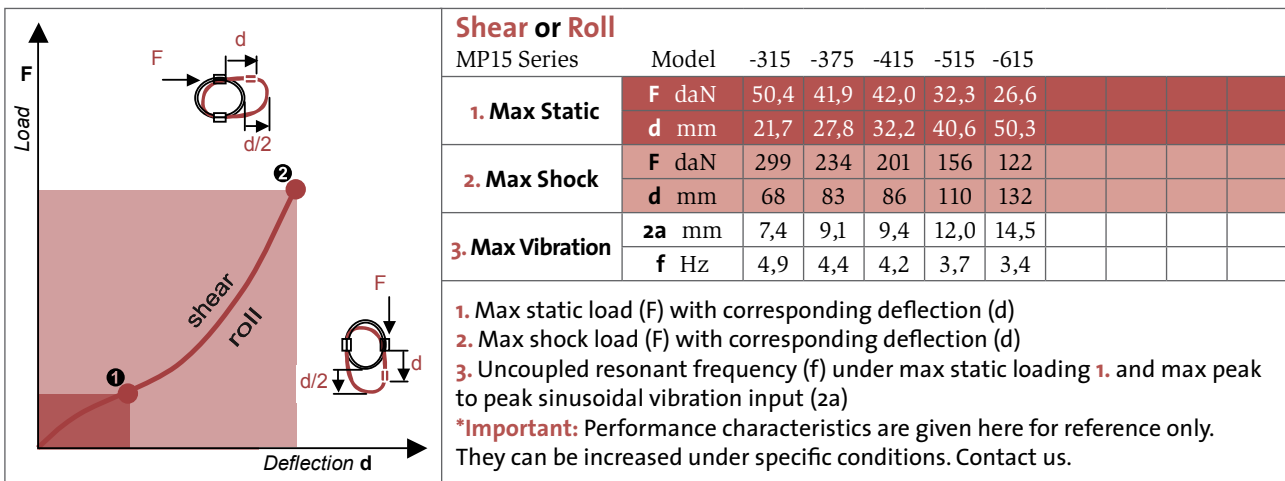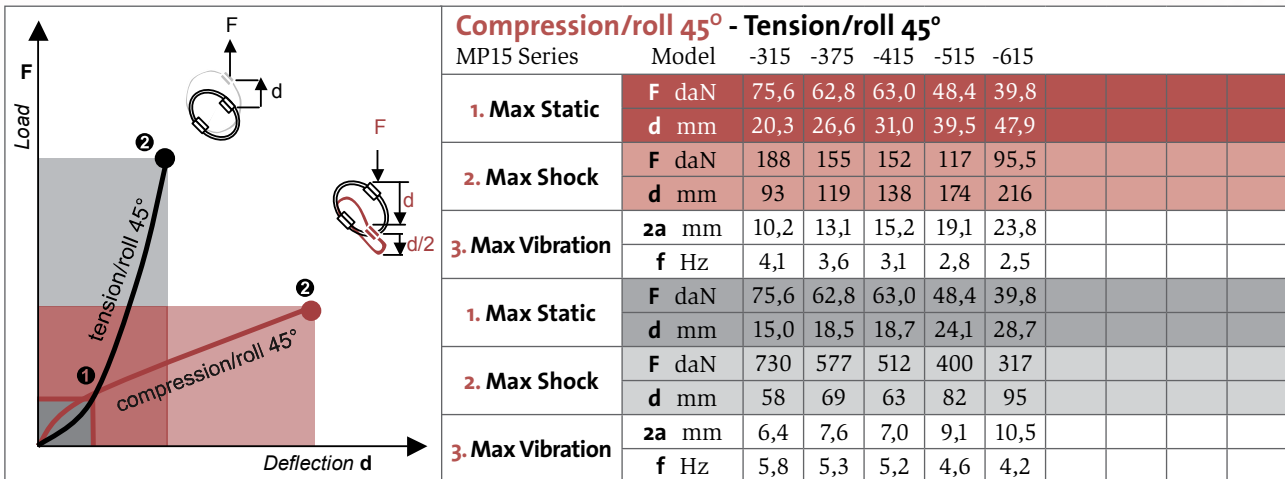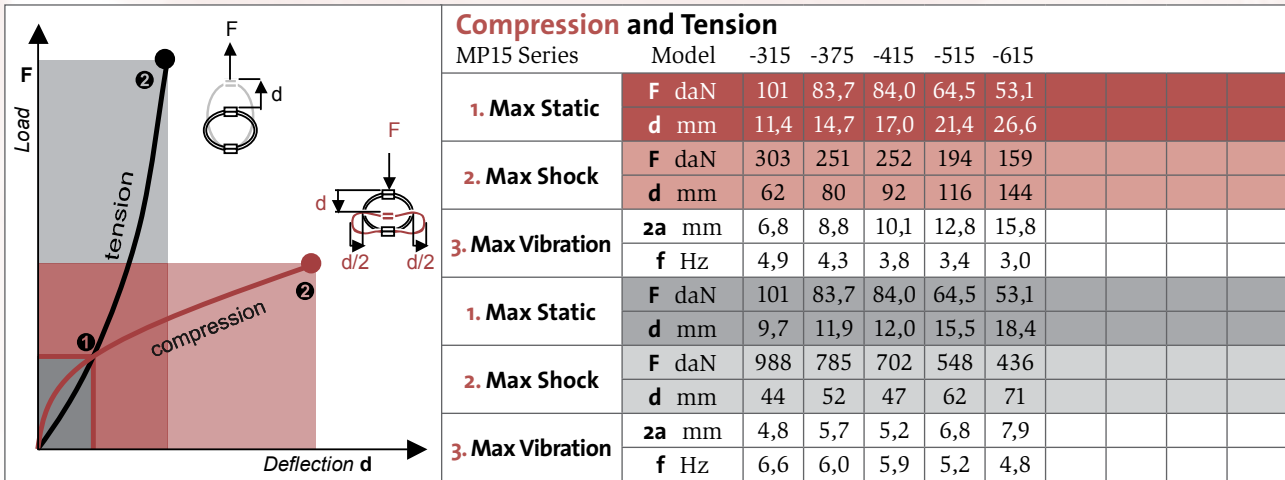

**Typical shock/vibration specifications:**

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.