


- All metal multidirectional anti-vibration/shock mounts.
- Exceptional reliability and long life.
- High damping.
- No ageing.
- Corrosion resistant.
- Unequalled temperature range $-180^{\circ}\text{C} +300^{\circ}\text{C}$.
- Cheap and quick prototypes from stock.




Dimensions are in mm. For reference only.

Series
Materials and finishes (meets RoHS requirements)
MP4
Cable: stainless steel
Interfaces: aluminium alloy
Insert: stainless steel.
Other materials on request

Model	height h (mm)	width u (mm)	width v (mm)	mass (kg)
-90	40	47	57	0,07
-120	48	53	64	0,07
-145	56	59	68	0,08
-195	72	69	80	0,09

Interfaces	fixtures holes D
Top 1	1 through hole $\varnothing 5,8$ mm (option: Insert M8)
Bottom 2	2 through holes $\varnothing 5,8$ mm

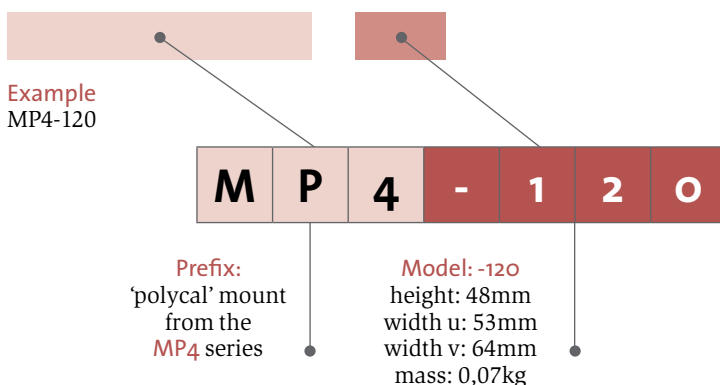

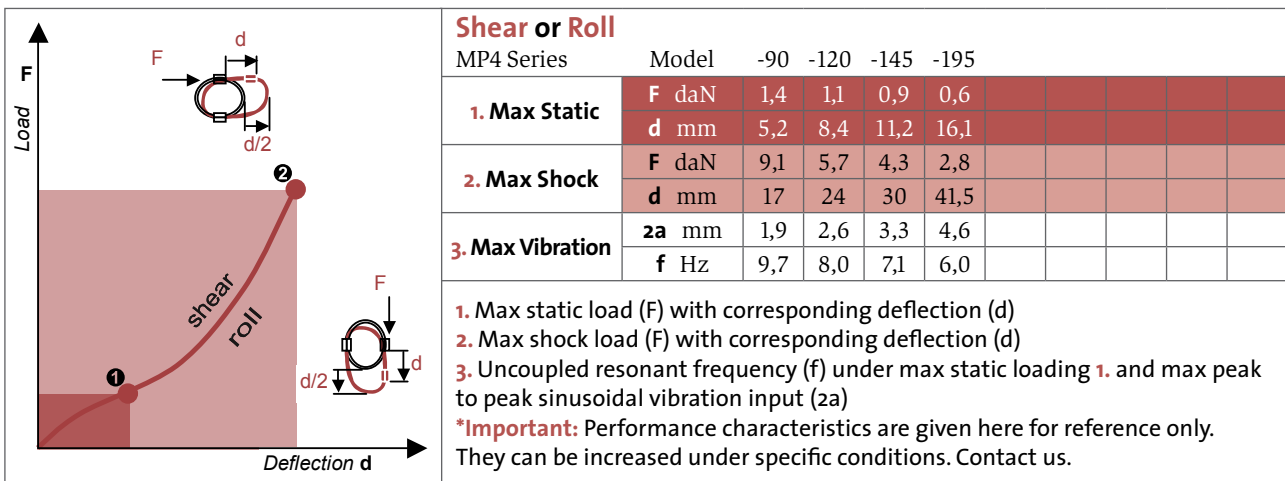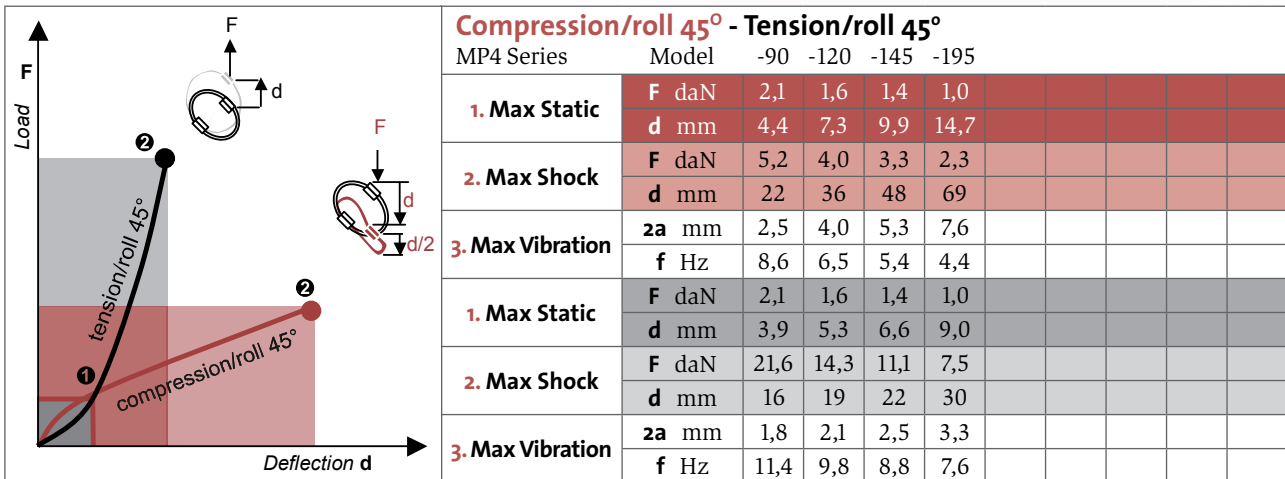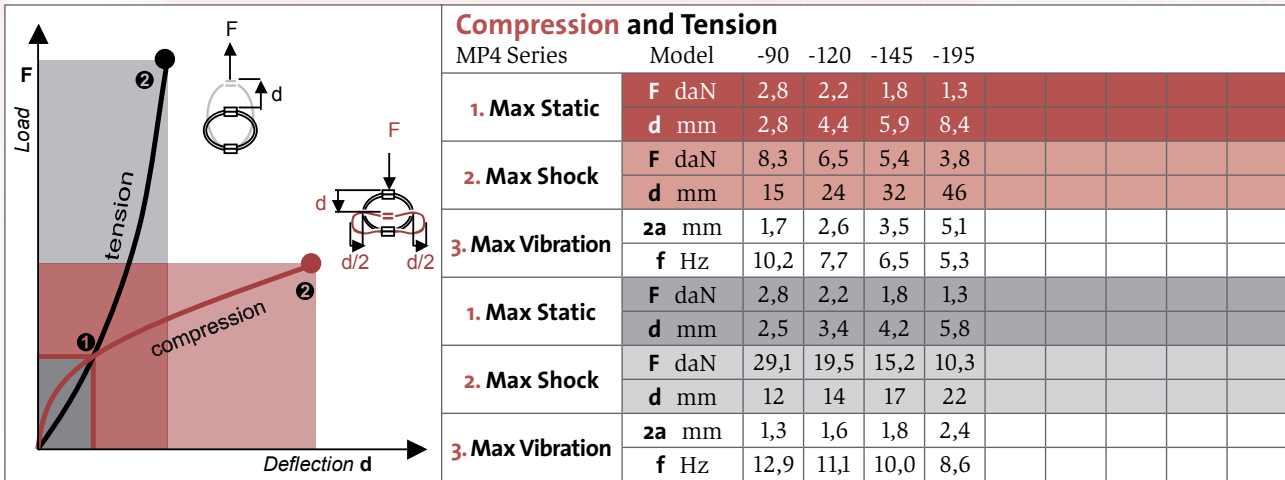

Typical shock/vibration specifications:

- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.
- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044.
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C.