

# Data Sheet

## Noise-Lock® D-200 Steel Acoustic Door

### IAC Acoustics

IAC House, Moorside Road, Winchester  
Hampshire, SO23 7US, United Kingdom  
T: +44 (0) 1962 873 000  
[www.iac-acoustics.com](http://www.iac-acoustics.com)



### Overview

- Certified performance rating
- Manufactured to standard and custom sizes
- Available as single leaf or double door sets with or without glazing
- Cam-lift hinges used to maximise acoustic seal
- Rugged steel construction
- Factory assembled and checked
- Finished in polyester powder coating as standard
- Wood veneer (US) and digital print (Europe) finish options available

#### Standard Features



Acoustic  
Rated



Easy Access  
Flat Thresholds

#### Optional Extras



Blast  
Resistance



RF  
Shielding



Fire  
Rated

### Acoustic Rating

STC-53 to achieve minimum NIC 48 once installed (subject to flanking).

Rw (C; Ctr) 52 (-2 ; -7) dB to achieve minimum R'w47dB once installed (subject to flanking).

Certified laboratory performance in single leaf arrangement as follows:

Frequency	63	125	250	500	1k	2k	4k	8k	Hz
Noise-Lock® D-200	22	30	47	52	54	51	57	55	dB

## Overview



IAC Acoustics produces an engineered system — factory assembled complete with a leaf, architectural split-frame, acoustic seals, cam-lift hinges and hardware. All doors are pre-hung for operational alignment, fit and finish before shipping.

Noise-Lock® doors are laboratory-tested for performance in both IAC R&D facilities and independent laboratories, further supported by installed site testing. IAC Acoustics is renowned for quality, durability and guarantees in-field performance.

## Hardware

IAC Acoustics Noise-Lock® doors are available with a number of standard and custom hardware options. Please consult the IAC Hardware Catalogue for standard packs and bespoke options such as electronic systems, access control and automated operation. Bespoke options are also available by contacting your local IAC Acoustics office.


- ① Acoustic Seal
- ② Cam-lift Hinge
- ③ Boot Seal
- ④ Sill
- ⑤ Architrave / Male Frame
- ⑥ Main Frame / Female Frame

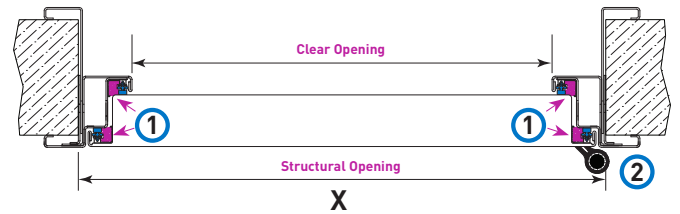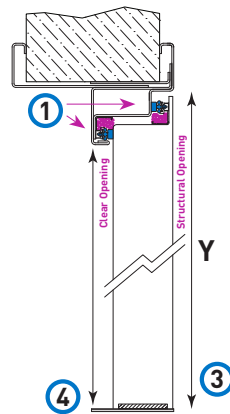

The relationship between the clear and structural openings for both width and height is the same for all sizes of Noise-Lock® D-200 doors. Measurements to consider can be seen in the table below.

	width	height
Structural Opening	X	Y
Clear Opening	X - 146mm	Y - 81mm*

\* excludes threshold

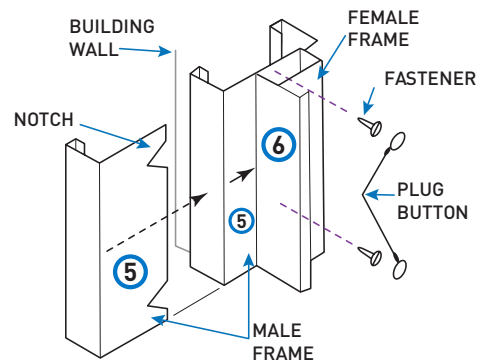

## Performance Features

- Self-aligning magnetic seals assure long life and high in-field performance, even under constant use
- Cam-lift hinges lower and seal the door to the floor eliminating the high maintenance of automatic drop seals
- Split frames eliminate in-field grouting to achieve the specified acoustic performance with quick and clean installation



## IAC Acoustics

IAC House  
Moorside Road  
Winchester, SO23 7US

T: +44 (0) 1962 873 000  
F: +44 (0) 1962 873 111  
E: winchester@iac-acoustics.com

[www.iac-acoustics.com](http://www.iac-acoustics.com)