

Data Sheet

Noise-Lock® W-300 Acoustic Window

IAC Acoustics

IAC House, Moorside Road, Winchester
Hampshire, SO23 7US, United Kingdom
T: +44 (0) 1962 873 000
www.iac-acoustics.com



Overview

- Certified performance rating
- Manufactured to standard and custom sizes
- Rugged steel construction
- Finished in polyester powder coating as standard

Standard Features



Acoustic
Rated

Optional Extras



Fire
Rated

Acoustic Rating

STC-54(dB) to achieve minimum NIC 52 once installed (subject to flanking).

Rw (C; Ctr) 53 [-2; -7] dB to achieve minimum R'w51dB once installed (subject to flanking).

Calculated performance using standard 200mm wall thickness arrangement as follows:

Frequency	63	125	250	500	1k	2k	4k	8k	Hz
Noise-Lock® W-300	31	39	48	57	65	67	78	-	dB



Bullet
Resistance



Angled
Panels

Overview


IAC Acoustics produces an engineered system — custom-designed in-house to suit the required opening of any given project. Utilising precision laser cutting and state-of-the-art fabrication, all Noise-Lock® windows are simple to assemble on site by our network of highly experienced installation crews.

Noise-Lock® windows are laboratory-tested for performance in both IAC's own R&D facilities and independent laboratories, further supported by installed site testing. IAC Acoustics is renowned for quality, durability and guarantees in-field performance.

Design Features

IAC Acoustics Noise-Lock® windows are available with a number of standard and custom design options. Please consult IAC Acoustics for availability of both standard and bespoke features such as angled panes, bullet resistant glass and EN 16 34-1 (E1) fire rated frames in various specifications. All IAC Noise-Lock® windows are built to order and site assembled using laminated safety glass as standard.

- ① 6.4mm laminated safety glass
- ② 6.4mm laminated safety glass
- ③ Acoustic foam
- ④ Host wall
- ⑤ Neoprene acoustic seal
- ⑥ Painted steel capping frame
- ⑦ Acoustic foam retainer

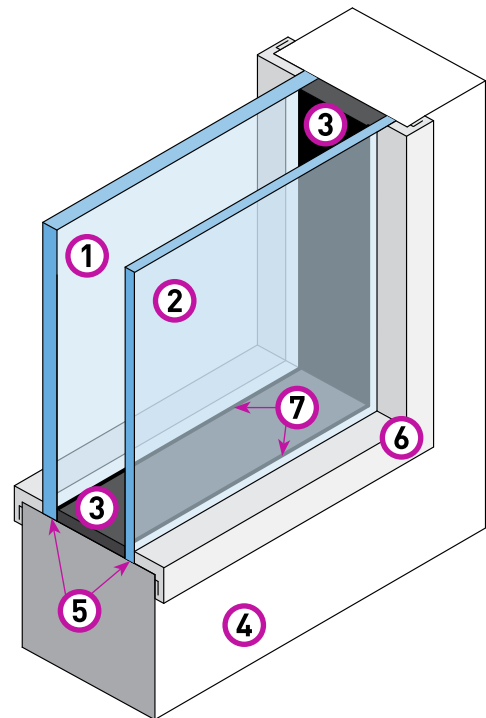

The relationship between the clear view and structural openings for both width and height is the same for all sizes of Noise-Lock® W-300 windows. Measurements to consider can be seen in the table below.

	width	height
Structural Opening	X	Y
Clear View	X - 66mm	Y - 66mm

Performance Features

- Acoustically de-coupled high performance steel acoustic window
- Architecturally aesthetic steel capping frame with secret fixings as standard
- Custom-built to order with various options for:
 - angled panes
 - fire resistance
 - bullet resistance

IAC Acoustics

IAC House
Moorside Road
Winchester, SO23 7US

T: +44 (0) 1962 873 000
F: +44 (0) 1962 873 111
E: winchester@iac-acoustics.com

www.iac-acoustics.com