


low frequency elastomer mounts

series

standard line "BFB"

BFB

definition

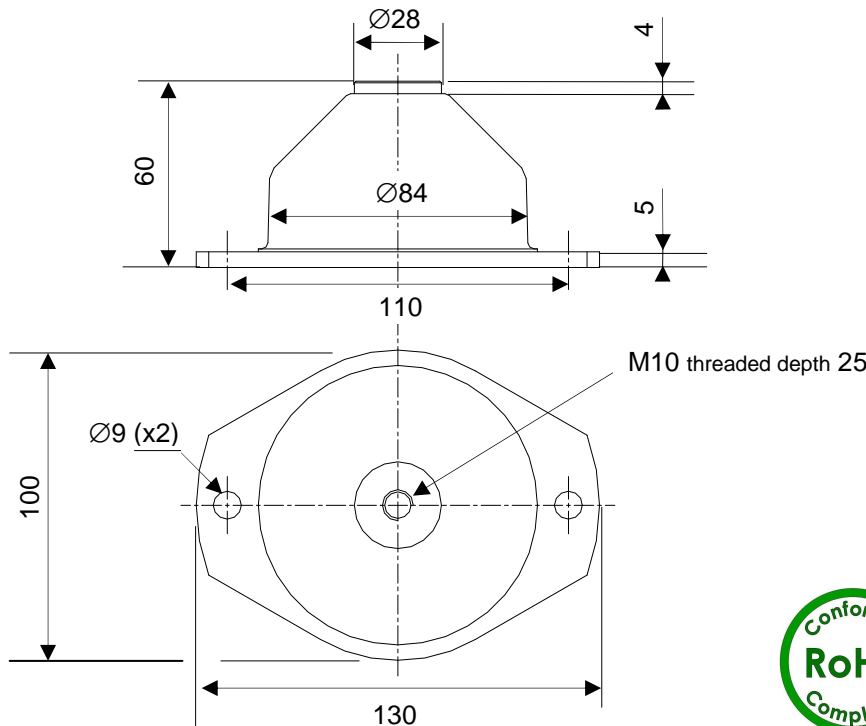

Dimensions in mm

- Multidirectional anti-vibration/ shock mounts.
- Displacement under shock up to 30mm.
- Transmissibility : $Q < 6$.
- Maximum static loading à 3g.
- Resonant frequency between 8 and 14Hz (*).
- Max peak output at resonance up to 1,25mm.
- Temperature range : -30°C +100°C.
- Great adaptability/versatility : Specials on request (materials, size and interfaces, etc.).



Series

Materials and finishes

BFB

Elastomer :
polychloroprene
Top and bottom interfaces :
corrosion protected steel

Other materials on request.

Load

capability	static load (daN)		axial stiffness	mass (kg)
	mini	maxi	(N.mm ⁻¹)	
1	15	45	85	0,60
2	30	70	145	
3	50	120	250	

Example :
BFB2



Prefix :
"Low Frequency" mount from the **BFB** series

Model : 2
min static load : 30 daN
max static load : 70 daN
axial stiffness : 145 N.mm⁻¹

(*)Note : Resonant frequency between 6 and 12Hz along radial direction.

01/07/2013

Socitec
BP 33, 78501 Sartrouville cedex - France
Telephone : +33 (0)1 61 04 60 00
Fax : +33 (0)1 39 14 03 27
<http://www.socitec.com>
e-mail : shock-intl@socitec.com

Document subject to modification without prior notice

